





IPT MobileBASE

Rapid Deployment Unit for Video Surveillance Cloud-managed with IPTECHVIEW $^{\text{TM}}$





In today's fast-paced world, the need for effective security measures is more crucial than ever. That's where the rapid deployment unit box for cameras comes into play.

Speaking of cameras, the unit comes with two top-of-the-line UNIVERSAL cameras: Turret IPT-U1-TRT-5F28-AD, complete with their corresponding mounting parts. These cameras are designed to deliver exceptional image quality and clarity, ensuring that every detail is captured with precision.

Designed to be installed on poles, or walls, this unit comes with an outdoor metal distribution box with IP66 rating, vandal resistant, and also UV proof, anti-corrosion, and anti-rust. Plus, with its built-in ventilation and heat dissipation system, you can be confident that your cameras will operate smoothly in any weather conditions.

This innovative box also features a DIN rail, perfect for mounting industrial equipment and managing power wires. And thanks to the stainless pole mounting straps, you can easily secure it to any pole without worrying about stability.

Inside the box, you'll find a group of additional components that elevate its functionality to the next level. Firstly, there's the cloud-managed IPTECHVIEW LTE gateway, with all the features required, and with its 4-port PoE switch 802.11at, you can easily connect and power your cameras without any hassle. This multi-band gateway has been tested with T-Mobile, AT&T, and Verizon in the US and Canada. A high-sensitivity, low-power-consumption, and waterproof IP67 GPS could be added to the unit for tracking and precise position updates.

Easy Plug & Play Cloud Management for the Cameras and LTE Gateway

- No fixed IP or port forwarding needed
- > Full access to GUI through IPTECHVIEW
- Rich monitoring and alerting rules
- Monitoring and alerting
- Security certificate/preconfiguration

To keep everything powered up, the box includes a 120 W/48V DIN rail power supply. This ensures a reliable and stable power source for all your equipment, even in demanding environments.

But what about connectivity? Well, the box is equipped with 3 dB 5-in-1 antenna, with 4G LTE MIMO technology. This antenna ensures a strong and reliable connection, even in remote areas. The LTE gateway and cameras can be accessed locally via WiFi, and this feature can also be disabled for more security purposes.


Of course, no setup is complete without the necessary cables. That's why the box comes with Ethernet and electric cables included, making installation a breeze.

To ensure seamless operation, the box undergoes thorough configuration and testing before reaching your hands. This guarantees that everything is in perfect working order, ready to be deployed at a moment's notice.

And to top it all off, the box includes a monitoring license for the LTE gateway, valid for 12 months. This allows you to keep a close eye on your security system, ensuring optimal performance and peace of mind.

In conclusion, the rapid deployment unit box for cameras is a game-changer in the world of security. With its robust construction, cutting-edge components, and comprehensive features, it provides everything you need to keep a watchful eye on your surroundings. So why settle for anything less when you can have the best? Upgrade your security system today with this remarkable unit and experience peace of mind like never before.



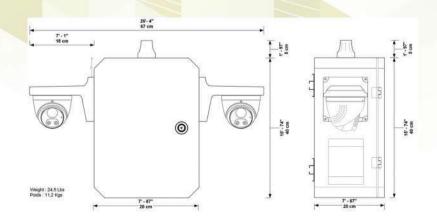

SPECIFICATIONS

| Cameras | LTEGate-PoE | Outdoor Distribution Box |
|---|--|---|
| Sensor 1/2.8", progressive scan, 5MP, CMOS Lens: 2.8mm@F1.6 Angle of View: 96° x 55.3° x 111.1° Adjustment Angle: Pan: 3°~360° Tilt: 0°~68° Rotate: 3°~360° Minimum Illumination: Color: 0.003 Lux 0 Lux with IR Built-in Mic: Supported Dimensions: 4.4"x3.7"; 0.93 lb | Dual SIM LTE Cat. 4, 1*RJ45 GE WAN 4-Port PoE 802.3at (Gigabit) 1*WiFi 11n/ac 2T2E 1*RS232/485, 1*DI+1*DO, 1*USB Metal Housing, DIN-Rail/Bracket Dual DC 24-56V TB, -30°C ~ 70°C Dimensions: 2.44 x 4.92 x 6.3" | IP66, Vandal Resistant UV Proof, metal, anti-corrosion, anti-trust ventilation and heat dissipation DIN Rail Power wire management and stainless pole mounting, mounting straps Dimensions: 17.7 x 11.8 x 7.9"; 24.5 lbs (with all equipment installed) |

OPTIONS

| SKU | DESCRIPTION | |
|----------------------|---|--|
| IPT-MobileBASE | Outdoor Head-end Distribution Box: IP66, vandal resistant, UV -proof, anti-corrosion, anti-rust coated with ventilation slots | |
| IPT-MobileBASE-2CAM | IPT MobileBASE with 2 cameras | |
| IPT-Mobile-AddOn-GPS | High sensitivity SIRF Star IV high performance GPS chipset | |
| IPT-U1-PTZ-25x | Optional: PTZ camera as an add-on to any of the above items | |